


25006/VMS (2512)

ISA-PLAN® PRECISION RESISTOR

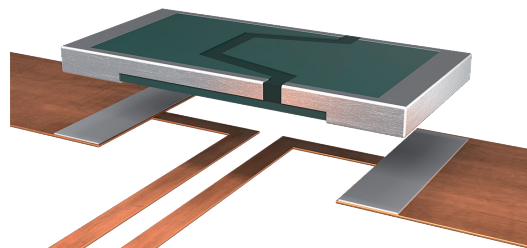

FEATURES

- Constant current up to 20 A (5 mOhm)
- 2 W power rating at 70 °C
- Two-terminal configuration
- Excellent temperature behavior
- Excellent heat dissipation
- High application temperature range -65 to +170 °C
- SnPb plated terminals

APPLICATIONS


- Industrial Grade / Engineering Models (Test Code A)
- Military Grade (Test Code B)
- Space Level (Test Code T)

Technical data

Resistance values	mOhm	5 to 1000		
Tolerance	%	0.5 / 1		
Temperature coefficient	ppm/K	-55°C to +25°C	+25°C to +125°C	-55°C to +125°C
		±60	±35	±50
Applicable temperature range	°C	-65 to +170		
Power rating P_{70°C}	W	2		
Stability (at rated power) deviation after 1000h, T_K = Terminal temperature	%	< 0.5 ($T_K=70^\circ\text{C}$)		


Ordering code Isabellenhütte

VMS - 1R00 - 0.5 - MB

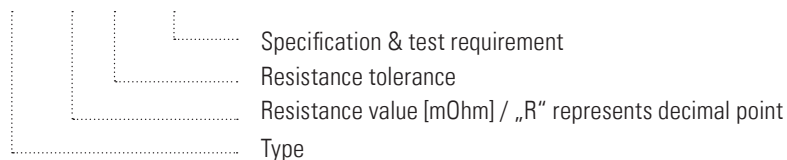

DLA Part or Identifying Number (PIN)

25006 - ***** DB

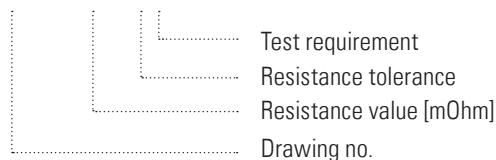


Recommended solder profile


Reflow-, IR-soldering				
Temperature	°C	260	255	217
Time	sec	peak	40	90

Tape and reel information

Specification		DIN EN 60286-3
Tape width	mm	12
Reel size	inch	13
Form of delivery		
Cut tape	pcs	up to 500
Tape and reel	pcs	>500

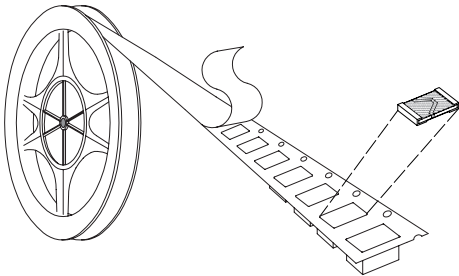

Mechanical dimensions and pcb-layout proposal (reflow-soldering) [mm]

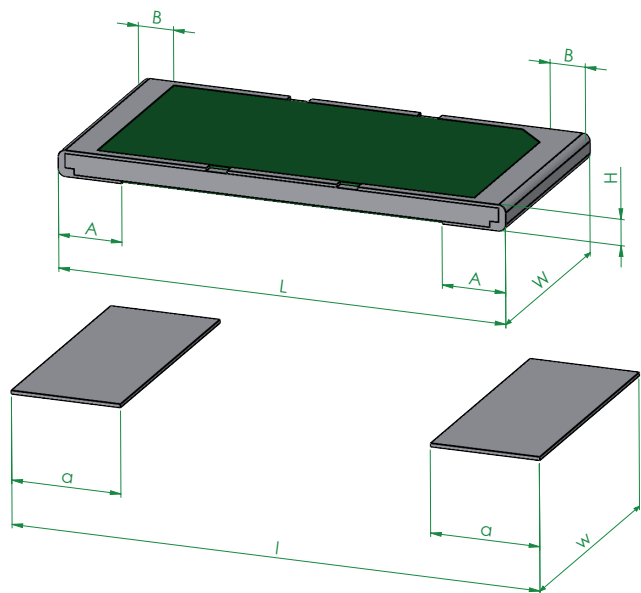

Type	L	W	H	A	B
VMS-Mx	6.35±0.3	3.05±0.2	0.4±0.15	0.9±0.2	0.5±0.2

Solder pad type	l	w	a
VMS-Mx	7.5	3.6	1.55

Available standard resistance values and tolerances. Further values on request.

Version	DLA drawing no.	Test code	Test requirements acc. to MIL-PRF 32773
Industrial Grade	25004	A	Group A inspection (M Level)
Military Grade		B	Group A & Group B inspection (T Level)
Space Level		T	Group A & Group B inspection (T Level) + Life Test (1000 hrs) acc. to para 4.5 of the DLA drawing

Ordering code	PIN
VMS-R005-0.5-MA	25006-OR005DA
VMS-R005-0.5-MB	25006-OR005DB
VMS-R005-0.5-MT	25006-OR005DT
VMS-R005-1.0-MA	25006-OR005FA
VMS-R005-1.0-MB	25006-OR005FB
VMS-R005-1.0-MT	25006-OR005FT
VMS-R0068-0.5-MA	25006-R0068DA
VMS-R0068-0.5-MB	25006-R0068DB
VMS-R0068-0.5-MT	25006-R0068DT
VMS-R0068-1.0-MA	25006-R0068FA
VMS-R0068-1.0-MB	25006-R0068FB
VMS-R0068-1.0-MT	25006-R0068FT
VMS-R010-0.5-MA	25006-OR010DA
VMS-R010-0.5-MB	25006-OR010DB
VMS-R010-0.5-MT	25006-OR010DT
VMS-R010-1.0-MA	25006-OR010FA
VMS-R010-1.0-MB	25006-OR010FB
VMS-R010-1.0-MT	25006-OR010FT
VMS-R012-0.5-MA	25006-OR012DA
VMS-R012-0.5-MB	25006-OR012DB
VMS-R012-0.5-MT	25006-OR012DT
VMS-R012-1.0-MA	25006-OR012FA
VMS-R012-1.0-MB	25006-OR012FB
VMS-R012-1.0-MT	25006-OR012FT
VMS-R015-0.5-MA	25006-OR015DA
VMS-R015-0.5-MB	25006-OR015DB
VMS-R015-0.5-MT	25006-OR015DT
VMS-R015-1.0-MA	25006-OR015FA
VMS-R015-1.0-MB	25006-OR015FB
VMS-R015-1.0-MT	25006-OR015FT
VMS-R020-0.5-MA	25006-OR020DA
VMS-R020-0.5-MB	25006-OR020DB
VMS-R020-0.5-MT	25006-OR020DT
VMS-R020-1.0-MA	25006-OR020FA
VMS-R020-1.0-MB	25006-OR020FB
VMS-R020-1.0-MT	25006-OR020FT
VMS-R022-0.5-MA	25006-OR022DA
VMS-R022-0.5-MB	25006-OR022DB
VMS-R022-0.5-MT	25006-OR022DT
VMS-R022-1.0-MA	25006-OR022FA
VMS-R022-1.0-MB	25006-OR022FB

Ordering code	PIN
VMS-R022-1.0-MT	25006-OR022FT
VMS-R025-0.5-MA	25006-OR025DA
VMS-R025-0.5-MB	25006-OR025DB
VMS-R025-0.5-MT	25006-OR025DT
VMS-R025-1.0-MA	25006-OR025FA
VMS-R025-1.0-MB	25006-OR025FB
VMS-R025-1.0-MT	25006-OR025FT
VMS-R027-0.5-MA	25006-OR027DA
VMS-R027-0.5-MB	25006-OR027DB
VMS-R027-0.5-MT	25006-OR027DT
VMS-R027-1.0-MA	25006-OR027FA
VMS-R027-1.0-MB	25006-OR027FB
VMS-R027-1.0-MT	25006-OR027FT
VMS-R030-0.5-MA	25006-OR030DA
VMS-R030-0.5-MB	25006-OR030DB
VMS-R030-0.5-MT	25006-OR030DT
VMS-R030-1.0-MA	25006-OR030FA
VMS-R030-1.0-MB	25006-OR030FB
VMS-R030-1.0-MT	25006-OR030FT
VMS-R033-0.5-MA	25006-OR033DA
VMS-R033-0.5-MB	25006-OR033DB
VMS-R033-0.5-MT	25006-OR033DT
VMS-R033-1.0-MA	25006-OR033FA
VMS-R033-1.0-MB	25006-OR033FB
VMS-R033-1.0-MT	25006-OR033FT
VMS-R039-0.5-MA	25006-OR039DA
VMS-R039-0.5-MB	25006-OR039DB
VMS-R039-0.5-MT	25006-OR039DT
VMS-R039-1.0-MA	25006-OR039FA
VMS-R039-1.0-MB	25006-OR039FB
VMS-R039-1.0-MT	25006-OR039FT
VMS-R040-0.5-MA	25006-OR040DA
VMS-R040-0.5-MB	25006-OR040DB
VMS-R040-0.5-MT	25006-OR040DT
VMS-R040-1.0-MA	25006-OR040FA
VMS-R040-1.0-MB	25006-OR040FB
VMS-R040-1.0-MT	25006-OR040FT
VMS-R047-0.5-MA	25006-OR047DA
VMS-R047-0.5-MB	25006-OR047DB
VMS-R047-0.5-MT	25006-OR047DT
VMS-R047-1.0-MA	25006-OR047FA

Available standard resistance values and tolerances. Further values on request.

Ordering code	PIN
VMS-R047-1.0-MB	25006-OR047FB
VMS-R047-1.0-MT	25006-OR047FT
VMS-R050-0.5-MA	25006-OR050DA
VMS-R050-0.5-MB	25006-OR050DB
VMS-R050-0.5-MT	25006-OR050DT
VMS-R050-1.0-MA	25006-OR050FA
VMS-R050-1.0-MB	25006-OR050FB
VMS-R050-1.0-MT	25006-OR050FT
VMS-R056-0.5-MA	25006-OR056DA
VMS-R056-0.5-MB	25006-OR056DB
VMS-R056-0.5-MT	25006-OR056DT
VMS-R056-1.0-MA	25006-OR056FA
VMS-R056-1.0-MB	25006-OR056FB
VMS-R056-1.0-MT	25006-OR056FT
VMS-R068-0.5-MA	25006-OR068DA
VMS-R068-0.5-MB	25006-OR068DB
VMS-R068-0.5-MT	25006-OR068DT
VMS-R068-1.0-MA	25006-OR068FA
VMS-R068-1.0-MB	25006-OR068FB
VMS-R068-1.0-MT	25006-OR068FT
VMS-R082-0.5-MA	25006-OR082DA
VMS-R082-0.5-MB	25006-OR082DB
VMS-R082-0.5-MT	25006-OR082DT
VMS-R082-1.0-MA	25006-OR082FA
VMS-R082-1.0-MB	25006-OR082FB
VMS-R082-1.0-MT	25006-OR082FT
VMS-R100-0.5-MA	25006-OR100DA
VMS-R100-0.5-MB	25006-OR100DB
VMS-R100-0.5-MT	25006-OR100DT
VMS-R100-1.0-MA	25006-OR100FA
VMS-R100-1.0-MB	25006-OR100FB
VMS-R100-1.0-MT	25006-OR100FT
VMS-R120-0.5-MA	25006-OR120DA
VMS-R120-0.5-MB	25006-OR120DB
VMS-R120-0.5-MT	25006-OR120DT
VMS-R120-1.0-MA	25006-OR120FA
VMS-R120-1.0-MB	25006-OR120FB
VMS-R120-1.0-MT	25006-OR120FT
VMS-R150-0.5-MA	25006-OR150DA
VMS-R150-0.5-MB	25006-OR150DB
VMS-R150-0.5-MT	25006-OR150DT
VMS-R150-1.0-MA	25006-OR150FA
VMS-R150-1.0-MB	25006-OR150FB
VMS-R150-1.0-MT	25006-OR150FT
VMS-R180-0.5-MA	25006-OR180DA
VMS-R180-0.5-MB	25006-OR180DB
VMS-R180-0.5-MT	25006-OR180DT
VMS-R180-1.0-MA	25006-OR180FA
VMS-R180-1.0-MB	25006-OR180FB
VMS-R180-1.0-MT	25006-OR180FT

Ordering code	PIN
VMS-R200-0.5-MA	25006-OR200DA
VMS-R200-0.5-MB	25006-OR200DB
VMS-R200-0.5-MT	25006-OR200DT
VMS-R200-1.0-MA	25006-OR200FA
VMS-R200-1.0-MB	25006-OR200FB
VMS-R200-1.0-MT	25006-OR200FT
VMS-R220-0.5-MA	25006-OR220DA
VMS-R220-0.5-MB	25006-OR220DB
VMS-R220-0.5-MT	25006-OR220DT
VMS-R220-1.0-MA	25006-OR220FA
VMS-R220-1.0-MB	25006-OR220FB
VMS-R220-1.0-MT	25006-OR220FT
VMS-R240-0.5-MA	25006-OR240DA
VMS-R240-0.5-MB	25006-OR240DB
VMS-R240-0.5-MT	25006-OR240DT
VMS-R240-1.0-MA	25006-OR240FA
VMS-R240-1.0-MB	25006-OR240FB
VMS-R240-1.0-MT	25006-OR240FT
VMS-R270-0.5-MA	25006-OR270DA
VMS-R270-0.5-MB	25006-OR270DB
VMS-R270-0.5-MT	25006-OR270DT
VMS-R270-1.0-MA	25006-OR270FA
VMS-R270-1.0-MB	25006-OR270FB
VMS-R270-1.0-MT	25006-OR270FT
VMS-R300-0.5-MA	25006-OR300DA
VMS-R300-0.5-MB	25006-OR300DB
VMS-R300-0.5-MT	25006-OR300DT
VMS-R300-1.0-MA	25006-OR300FA
VMS-R300-1.0-MB	25006-OR300FB
VMS-R300-1.0-MT	25006-OR300FT
VMS-R330-0.5-MA	25006-OR330DA
VMS-R330-0.5-MB	25006-OR330DB
VMS-R330-0.5-MT	25006-OR330DT
VMS-R330-1.0-MA	25006-OR330FA
VMS-R330-1.0-MB	25006-OR330FB
VMS-R330-1.0-MT	25006-OR330FT
VMS-R470-0.5-MA	25006-OR470DA
VMS-R470-0.5-MB	25006-OR470DB
VMS-R470-0.5-MT	25006-OR470DT
VMS-R470-1.0-MA	25006-OR470FA
VMS-R470-1.0-MB	25006-OR470FB
VMS-R470-1.0-MT	25006-OR470FT
VMS-R500-0.5-MA	25006-OR500DA
VMS-R500-0.5-MB	25006-OR500DB
VMS-R500-0.5-MT	25006-OR500DT
VMS-R500-1.0-MA	25006-OR500FA
VMS-R500-1.0-MB	25006-OR500FB
VMS-R500-1.0-MT	25006-OR500FT
VMS-R680-0.5-MA	25006-OR680DA
VMS-R680-0.5-MB	25006-OR680DB

Available standard resistance values and tolerances. Further values on request.

Ordering code	PIN
VMS-R680-0.5-MT	25006-0R680DT
VMS-R680-1.0-MA	25006-0R680FA
VMS-R680-1.0-MB	25006-0R680FB
VMS-R680-1.0-MT	25006-0R680FT
VMS-1R00-0.5-MA	25006-1R000DA
VMS-1R00-0.5-MB	25006-1R000DB
VMS-1R00-0.5-MT	25006-1R000DT
VMS-1R00-1.0-MA	25006-1R000FA
VMS-1R00-1.0-MB	25006-1R000FB
VMS-1R00-1.0-MT	25006-1R000FT

Disclaimer // All products, product specifications and data are subject to change without notice. The product specifications do not expand or otherwise modify Isabellenhütte's terms and conditions of sale, including but not limited to, the warranty expressed therein. Isabellenhütte makes no warranty, representation or guarantee other than as set forth in its terms and conditions of sale. Information provided in datasheets and/or specifications may vary from actual results in different applications. Any statements made by Isabellenhütte regarding the suitability of products for certain types of applications are based on its knowledge of typical requirements that are often placed on its products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in the application intended. No license, express or implied, or otherwise, to any intellectual property rights is granted by this document. Any and all liability arising out of the application or use of any product shall be as set forth in Isabellenhütte's terms and conditions of sale.

